WEIR CONCEPTS INC.

PRODUCT GUIDE

- WC FITTINGS -



EXPECT QUALITY AND RELIABILITY

using our brand name WC FITTINGS





7596 Wagner RD NW

Edmonton, Alberta

CANADA T6E 5B2

780.462.1910 ph

780.462.1959 fax

info@weirconcepts.com

www.weirconcepts.com

MADE IN ALBERTA, CANADA PRODUCTS

Manufactured and assembled at our Edmonton based facility


DETAILS ARE THE DIFFERENCE BETWEEN ORDINARY AND EXCELLENCE

VENTED CAP BODY GREASE FITTINGS

Our standard body grease fitting feature Positive Flow Ball Support. This design directs the flow of the lubricant and/or sealant through the center of the spring without passing through the spring coil. This reduces the tendency to "pack-off". The Positive Flow Ball Support is available in many other fitting styles.

Another feature of the standard body grease fitting is the heavy-duty radial rivet crimp. This special crimp provides the best "blow-out" protection of any available crimped style fitting. The radial rivet crimp process conforms to the latest revision of NACE.

THE CENTRE OF THE BALL SUPPORT AND SPRING,
WITHOUT PASSING THROUGH THE SPRING COIL.

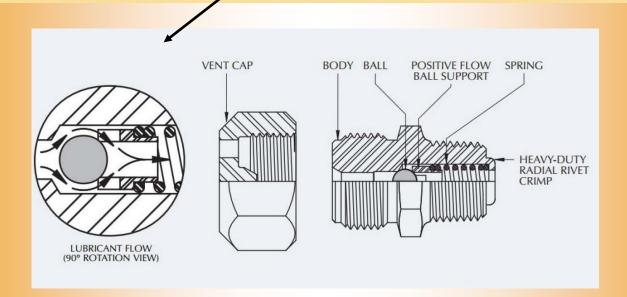

Weir Concepts at work for you

VENTED CAP BODY GREASE FITTINGS


THREAD SIZE	MATERIAL	PLATING	HEAT TREATMENT	BALL	SPRING
	1215	Zinc		**CA	302 SS
1" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monei	X-750
	1215	Zinc		**CA	302 SS
3/4" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel X-750
	4140	Zinc	Rc 22 Max (NACE)	K-Monel	
	1215	Zinc		**CA	302 SS
1/2" NPT	316 SS		Annealed (NACE)	17.14 18	Inconel X-750
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	
	1215	Zinc		**CA	302 SS
3/8" NPT	316 SS		Annealed (NACE)		Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	X-750
	1215	Zinc	**CA		302 SS
1/4" NPT	316 SS		Annealed (NACE)		Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	X-750

FOR SERVICE TO 10,000PSI

Weir Concepts offers a technical consulting and provides a total end to end solution.



Solutions for your **company** needs

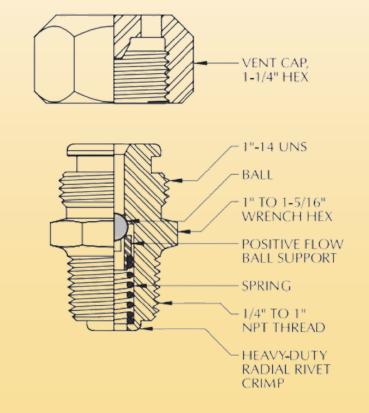


VENTED CAP BODY GREASE FITTINGS with Giant Button Head

THREAD SIZE	MATERIAL	PLATING	HEAT TREATMENT	BALL	SPRING	
	1215	Zinc		**CA	302 SS	
1" NPT	316 SS		Annealed (NACE)	I/ 14 100	Inconel	
	4140	Zinc	Rc 22 Max (NACE) K-Monel®		X-750	
	1215	Zinc		**CA	302 SS	
3/4" NPT	316 SS		Annealed (NACE)	I/ N4 10	Inconel X-750	
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®		
	1215	Zinc		**CA	302 SS	
1/2" NPT	316 SS		Annealed (NACE)	V M = 10	Inconel X-750	
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®		
	1215	Zinc	222	**CA		
3/8" NPT	316 SS		Annealed (NACE) Rc 22 Max (NACE) K-Monel®		Inconel X-750	
	4140	Zinc				
	1215	Zinc		**CA	302 SS	
1/4" NPT	316 SS		Annealed (NACE)		Inconel	
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	X-750	

FOR SERVICE TO 10,000PSI

Solutions for your company needs

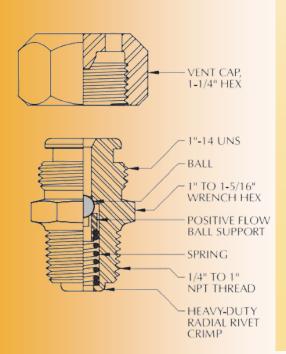




WEIR CONCEPTS IS PROUD TO PROVIDE

MADE IN CANADA PRODUCTS

MANUFACTURED AT OUR EDMONTON
BASED FACILITY

HIGH PRESSURE LUBRIATION AND SEALANT FITTINGS

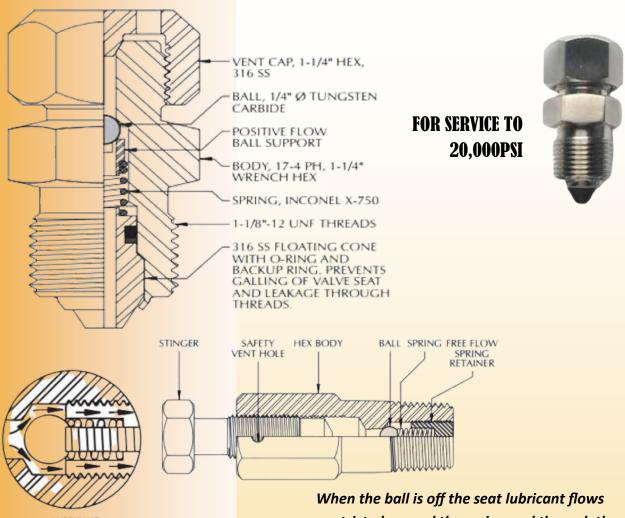

The free flow design of the Body
Grease Fitting is incorporated into our
Packing Injection Fittings. Compared
to standard floating ball designs, the
Free Flow's specially designed spring
retainer allows even the heaviest of
lubricants and/or sealant to flow
freely through the Packing Injection
Fitting.

Solutions for your **company** needs

When the ball is off the seat lubricant flows unrestricted around the spring and through the openings on the sides of the retainer.


- Positive back seating is provided without relying on the presence of back pressure.
- Guaranteed against "blow out" when used within design limitations of the fitting. Excellent in extreme cold environments.
- Meets latest revision of NACE no cold working materials.

Weir Concepts offers technical consulting and provides a total end to end solution.

PACKING INJECTION FITTINGS Floating Ball-Taper Cavity

Solutions for your company needs



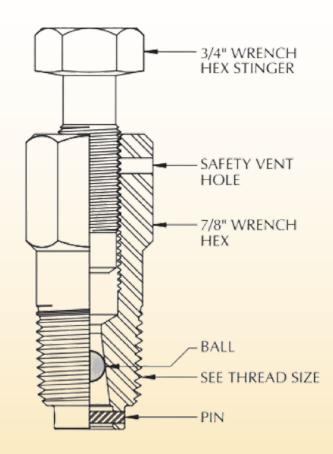

THREAD SIZE	MATERIAL	PLATING	HEAT TREATMENT	BALL	
	1215	Zinc		**CA	
1/2" NPT	316 SS		Annealed (NACE)	L Manal®	
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	
	1215	Zinc		**CA	
3/8" NPT	316 SS		Annealed (NACE)	K-Monel®	
	4140	Zinc	Rc 22 Max (NACE)		
	1215	Zinc		**CA	
1/4" NPT	316 SS		Annealed (NACE)	V.14	
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	
3/4" - 10 UNC	1215	Zinc		302 SS	
5/8" - 11 UNC	1215	Zinc		302 SS	


FOR SERVICE TO 10,000PSI

GIANT BUTTON HEAD FITTINGS Double Ball Check

Weir Concepts offers a technical consulting and provides a total end to end solution.







THREAD SIZE	MATERIAL	PLATING	HEAT TREATMENT	BALL	SPRING
	1215	Zinc		**CA	
1" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monei	X-750
THE RESERVE	1215	Zinc		CA	302 SS
3/4" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monei	X-750
	1215	Zinc		CA	302 SS
1/2" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monei	X-750
- MARKET OF THE PARTY.	1215	Zinc		CA	302 SS
3/8" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
300	4140	Zinc	Rc 22 Max (NACE)	K-Monei	X-750
	1215	Zinc	CA		302 SS
1/4" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel
	4140	Zinc	Rc 22 Max (NACE)	K-Monel	X-750
3/4" - 10 UNC	1215	Zinc		CA	302 SS
5/8" - 11 UNC	1215	Zinc		CA	302 SS


FOR SERVICE TO 10,000PSI

BODY VENT (BLEEDER) FITTINGS Standard Hex Head Style

THREAD SIZE	MATERIAL	HEX SIZE	OAL	PLATING	HEAT TREATMENT	BALL	
	1215	2"	2-5/8"	Zinc		440 SS	
1-1/2" NPT	316 SS	2"			Annealed (NACE)	**TC	
	4140		2-5/8"	Zinc	Rc 22 Max (NACE)	IC	
Democratical and the state of	1215	1-3/4"	2-5/16"	Zinc		440 SS	
1-1/4" NPT	316 SS	1-3/4"	2-5/16"		Annealed (NACE)	TC	
WARRY TATAL	4140	1-3/4	2-3/10	Zinc	Rc 22 Max (NACE)	10	
	1215	1-5/16"	2-3/16"	Zinc		440 SS	
1" NPT	316 SS	1-5/16"	2-3/16"		Annealed (NACE)	TC	
	4140			Zinc	Rc 22 Max (NACE)	I C	
polycens of Herican a	1215	1-1/8"	1-5/8"	Zinc		440 SS	
3/4" NPT	316 SS	1-1/8"	1-5/8"		Annealed (NACE)	TC	
	4140			Zinc	Rc 22 Max (NACE)	10	
	1215	7/8"	1-1/2"	Zinc		440 SS	
1/2" NPT	316 SS	7/8"	/8" 1-1/2"		Annealed (NACE)	TC	
	4140	7/0		Zinc	Rc 22 Max (NACE)	1 C	
	1215	7/8"	1-9/16"	Zinc		440 SS	
3/8" NPT	316 SS	7/8"	1-9/16"		Annealed (NACE)	TC	
	4140	7/0		Zinc	Rc 22 Max (NACE)	10	
	1215	7/8"	1-5/8"	Zinc		440 SS	
1/4" NPT	316 SS	7/8"	1 5/011		Annealed (NACE)	TC	
	4140	7/0	1-5/8"	Zinc	Rc 22 Max (NACE)	IC	

Solutions for your company needs






FOR SERVICE TO 10,000PSI


HEX SOCKET HEAD STYLE

THREAD SIZE	MATERIAL	HEX SIZE	OAL	PLATING	HEAT TREATMENT	BALL	
	1215	1-1/8"	1-5/8"	Zinc		440 SS	
3/4" NPT	316 SS	1-1/8"	1-5/8"		Annealed (NACE)	**TC	
	4140	1-1/0	1-3/0	Zinc	Rc 22 Max (NACE)	10	
	1215	7/8"	1-1/2"	Zinc		440 SS	
1/2" NPT	316 SS	7/8"	1-1/2"		Annealed (NACE)	TC	
	4140			Zinc	Rc 22 Max (NACE)	TC	
	1215	7/8"	1-9/16"	Zinc		440 SS	
3/8" NPT	316 SS	7/8"	1-9/16"	·	Annealed (NACE)	TC	
	4140	7/0		Zinc	Rc 22 Max (NACE)	TC	
	1215	7/8"	1-5/8"	Zinc		440 SS	
1/4" NPT	316 SS	7/8"	1-5/8"	(5.5) 5 (Annealed (NACE)	TC	
100 100 100 100	4140	//8"	1-5/6	Zinc	Rc 22 Max (NACE)	TC	

FOR SERVICE TO 10,000PSI



THREAD SIZE	MATERIAL	PLATING	HEAT TREATMENT	BALL	SPRING	OAL
1/2" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel X-750	15/16"
1/2 1911	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	Inconel X-750	15/16"
3/8" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel X-750	7/8"
3/0 NF1	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	Inconel X-750	7/8"
1/4" NPT	316 SS		Annealed (NACE)	K-Monel®	Inconel X-750	3/4"
1/4 INF1	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	Inconel X-750	3/4"
1/4" NPT	316 SS	4.4.4	Annealed (NACE)	K-Monel®	Inconel X-750	21/32"
	4140	Zinc	Rc 22 Max (NACE)	K-Monel®	Inconel X-750	21/32"



FOR SERVICE TO 10,000PSI

INTERNAL CHECK FITTINGS
Single Ball Check,
Soft Seat, Spring Biased

PRODUCT GUIDE

WEIR CONCEPTS WC FITTINGS



SOLUTIONS FOR YOUR COMPANY NEEDS

- HELP DESK -

FOR YOUR SUPPORT AND SERVICE

24 hours a day, 7 days a week NO CHARGE ON CALLS SERVICE

We offer technical assistance, product knowledge, and reliable trouble shooting

Brochures/Maintenance info available online www.weirconcepts.com

HELP DESK EXPERTISE PROVIDED AT WEIR CONCEPTS

7596 Wagner RD NW

Edmonton, Alberta

CANADA T6E 5B2

780.462.1910 ph

780.462.1959 fax

info@weirconcepts.com

www.weirconcepts.com





